



Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 160 / Ant. 8/9

Vertical

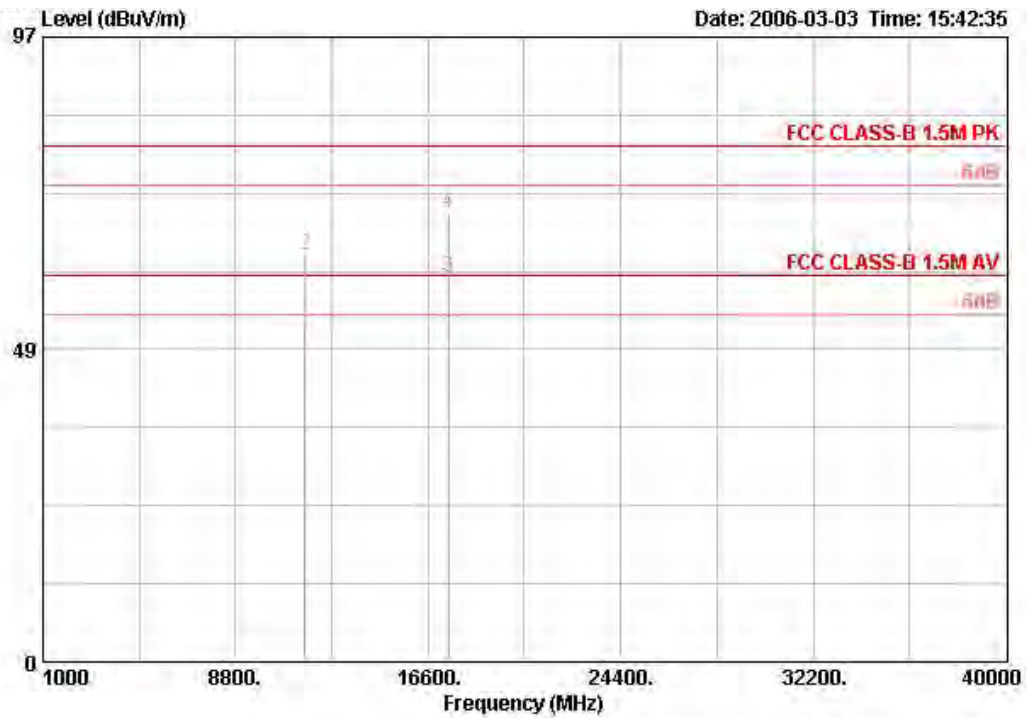

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11597.600	51.95	-8.05	60.00	39.22	7.10	35.14	40.77	AVERAGE	103	11
2	11597.600	63.25	-16.75	80.00	39.22	7.10	35.14	52.07	PEAK	103	11
3	17407.400	59.76	-0.24	60.00	41.66	16.91	35.06	36.25	AVERAGE	127	313
4	17407.400	69.81	-10.19	80.00	41.66	16.91	35.06	46.30	PEAK	127	313

Horizontal

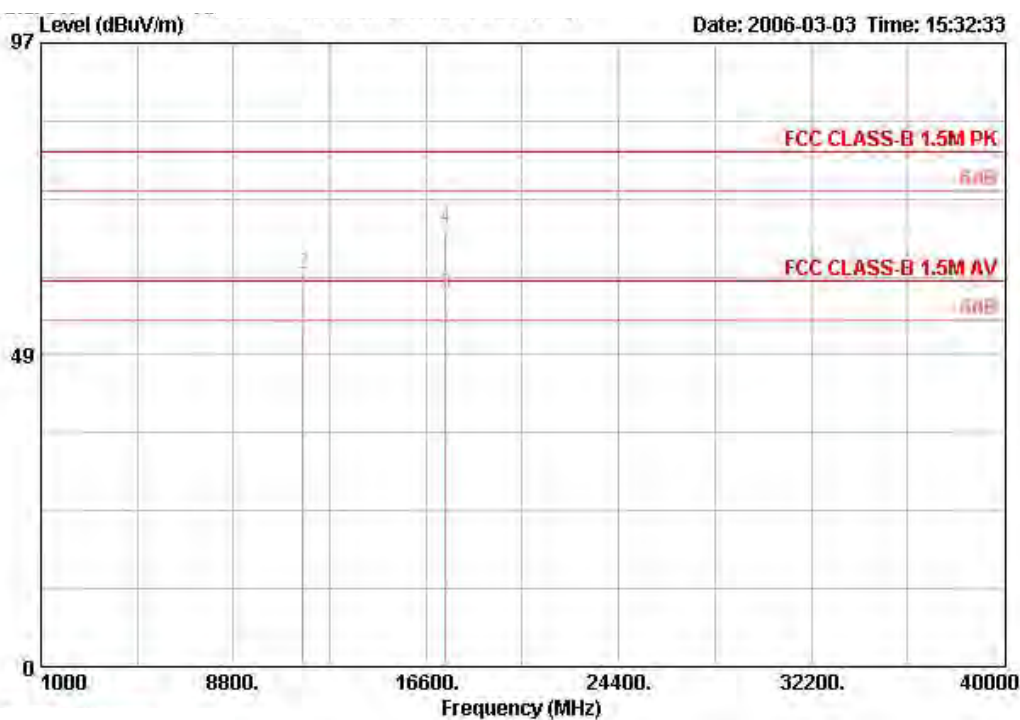

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	11600.900	50.62	-9.38	60.00	39.22	7.10	35.14	39.44 AVERAGE	125	265
2	11600.900	61.17	-18.83	80.00	39.22	7.10	35.14	49.98 PEAK	125	265
3 @	17404.700	57.76	-2.24	60.00	41.66	16.91	35.06	34.25 AVERAGE	108	272
4	17404.700	68.28	-11.72	80.00	41.66	16.91	35.06	44.77 PEAK	108	272

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 10


Vertical

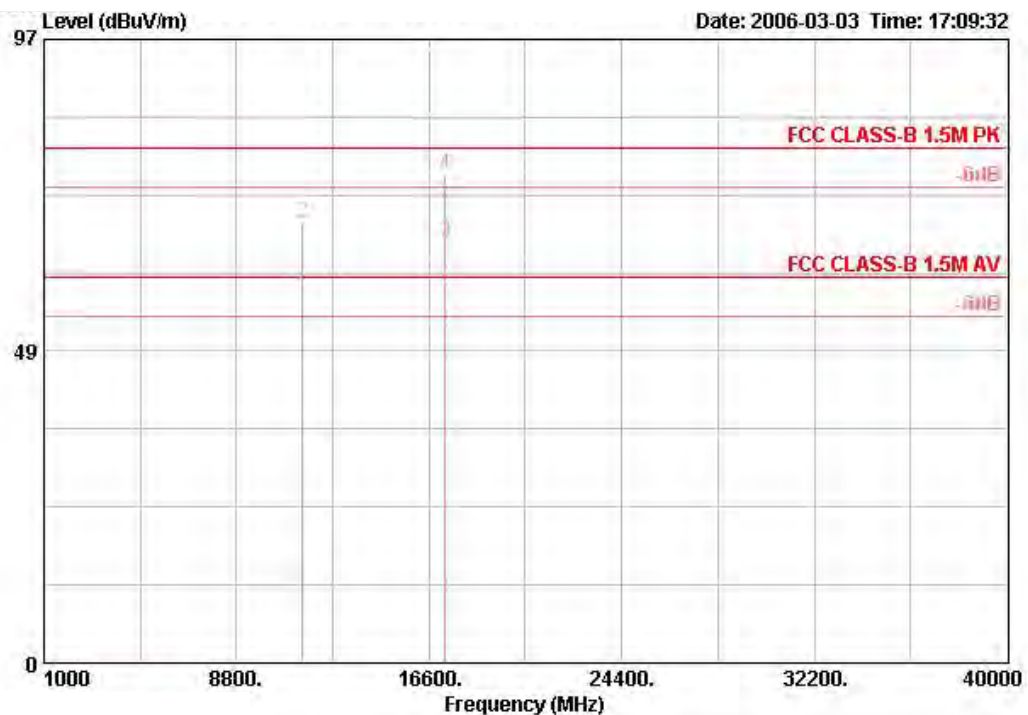

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11487.840	57.04	-2.96	60.00	39.20	6.96	35.10	45.98	AVERAGE	107	1
2	11487.840	68.56	-11.44	80.00	39.20	6.96	35.10	57.50	PEAK	107	1
3	17238.520	65.45			40.93	18.15	35.00	41.38	AVERAGE	107	264
4	17238.520	76.04	-3.96	80.00	40.93	18.15	35.00	51.96	PEAK	107	264

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

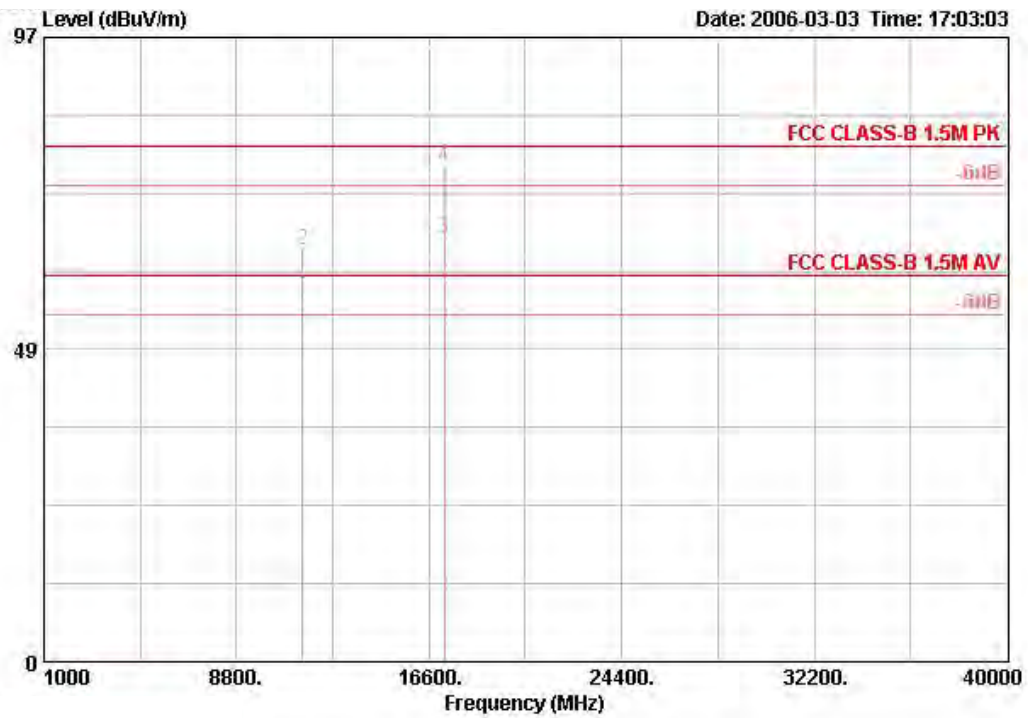


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11489.280	54.11	-5.89	60.00	39.20	6.96	35.10	43.05	AVERAGE	105	313
2	11489.280	64.07	-15.93	80.00	39.20	6.96	35.10	53.01	PEAK	105	313
3	17231.640	65.78			40.93	18.15	35.00	41.70	AVERAGE	104	284
4	17231.640	76.95	-3.05	80.00	40.93	18.15	35.00	52.87	PEAK	104	284

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 10


Vertical

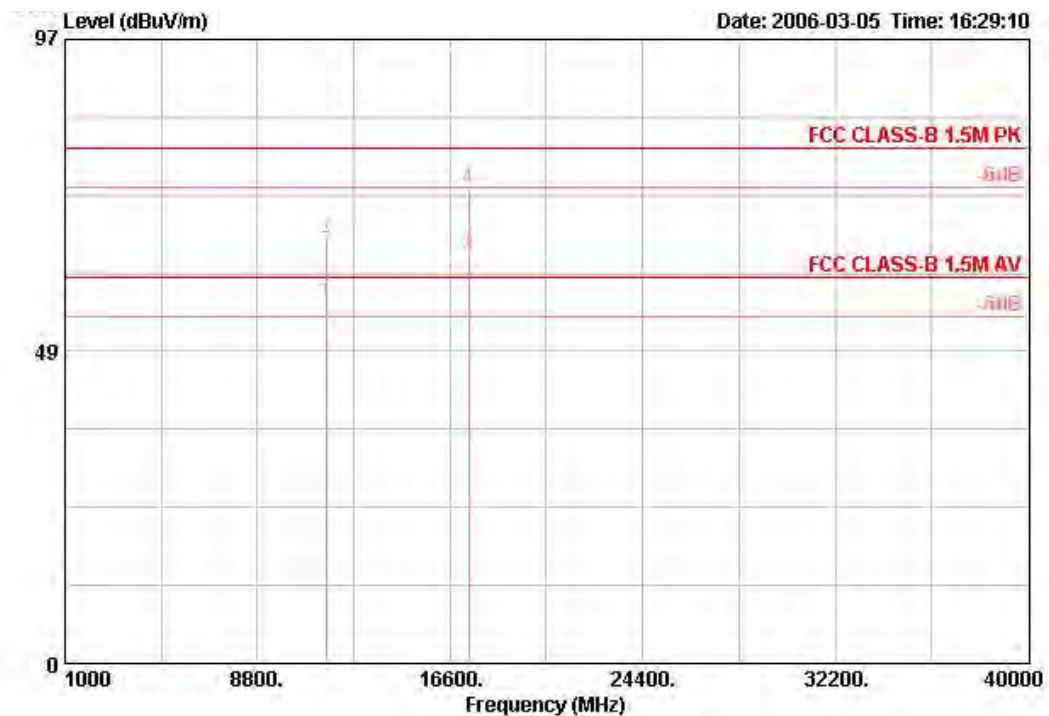

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11569.680	56.39	-3.61	60.00	39.21	7.06	35.12	45.24	AVERAGE	100	232
2 @	11569.680	66.15	-13.85	80.00	39.21	7.06	35.12	55.01	PEAK	100	232
3 @	17357.240	63.48			41.44	17.41	35.04	39.67	AVERAGE	100	300
4 @	17357.240	73.61	-6.39	80.00	41.44	17.41	35.04	49.80	PEAK	100	300

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

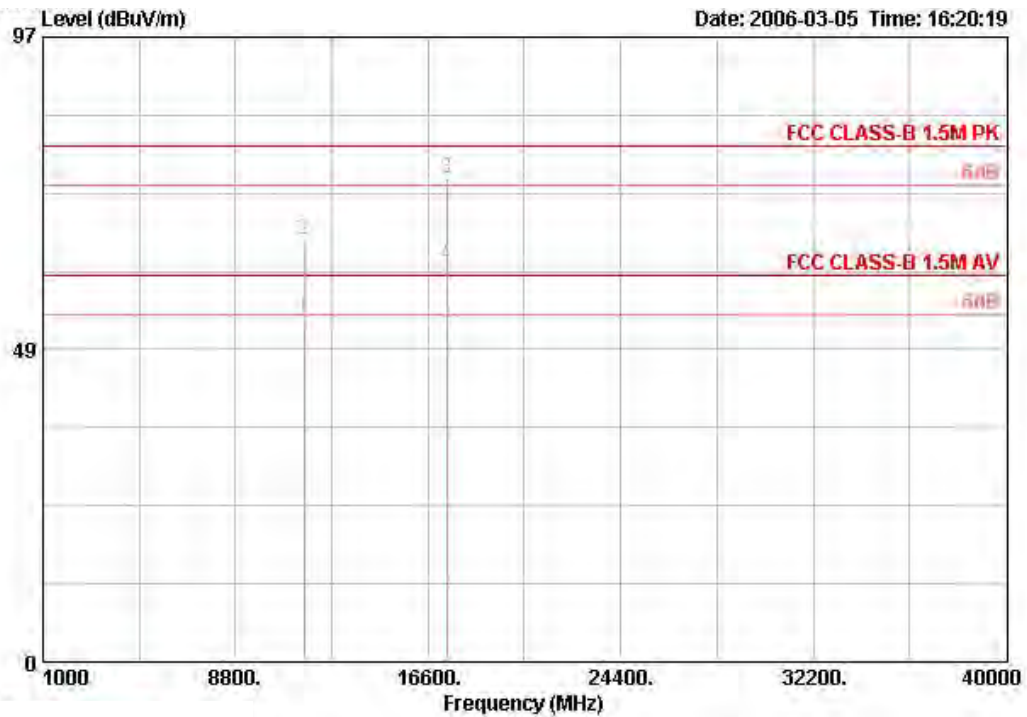


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11569.080	53.48	-6.52	60.00	39.21	7.06	35.12	42.33	AVERAGE	125	263
2 @	11569.080	65.42	-14.58	80.00	39.21	7.06	35.12	54.27	PEAK	125	263
3 @	17348.040	75.03	-4.97	80.00	41.44	17.41	35.04	51.22	PEAK	100	318
4 @	17356.680	61.61			41.44	17.41	35.04	37.80	AVERAGE	100	318

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 10


Vertical

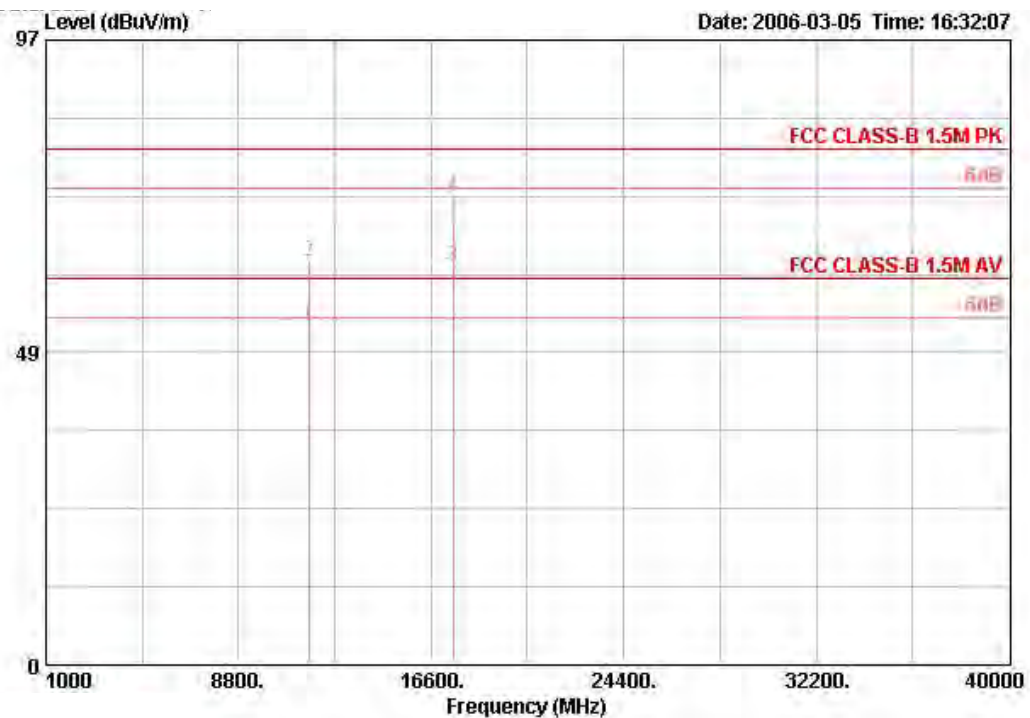

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11649.720	52.48	-7.52	60.00	39.23	7.15	35.16	41.27	AVERAGE	100	237
2 @	11649.720	62.69	-17.31	80.00	39.23	7.15	35.16	51.48	PEAK	100	237
3 @	17473.640	61.88			41.95	16.66	35.09	38.35	AVERAGE	100	311
4 @	17473.640	72.63	-7.37	80.00	41.95	16.66	35.09	49.10	PEAK	100	311

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.


## Horizontal

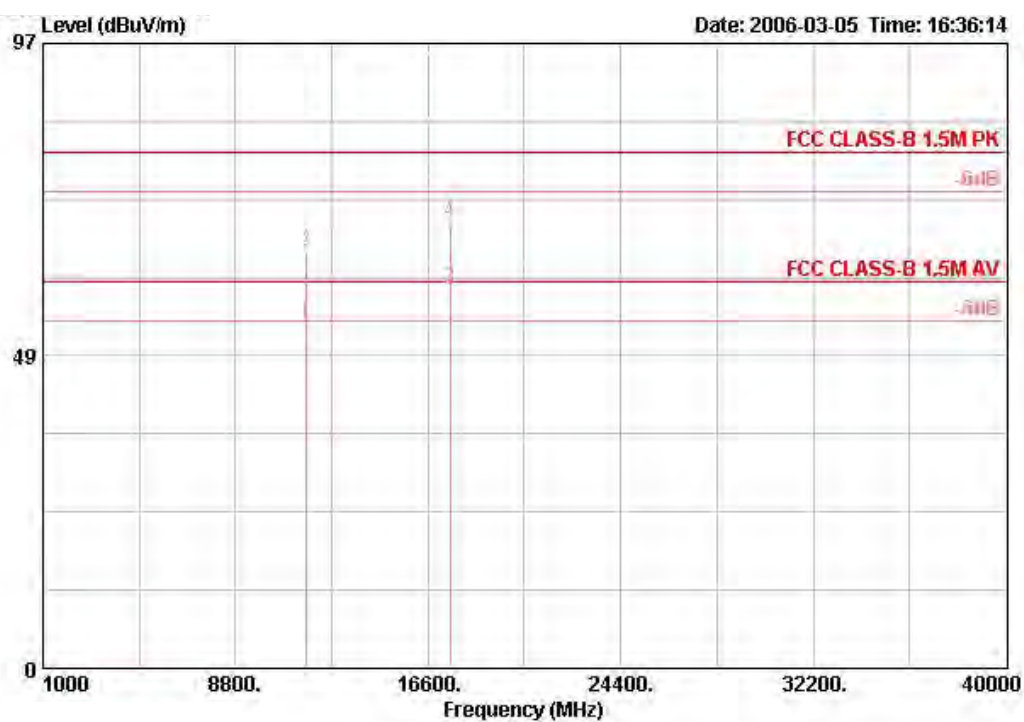

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m		dB	dBUV/m	dB/m	dB	dB	dBUV	cm	deg
1 @	11650.160	53.69	-6.31	60.00	39.23	7.15	35.16	42.48	AVERAGE	118	273
2 @	11650.160	64.82	-15.18	80.00	39.23	7.15	35.16	53.60	PEAK	118	273
3 @	17473.640	58.83	-1.17	60.00	41.95	16.66	35.09	35.30	AVERAGE	100	284
4 @	17473.640	69.17	-10.83	80.00	41.95	16.66	35.09	45.64	PEAK	100	284

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 10


Vertical

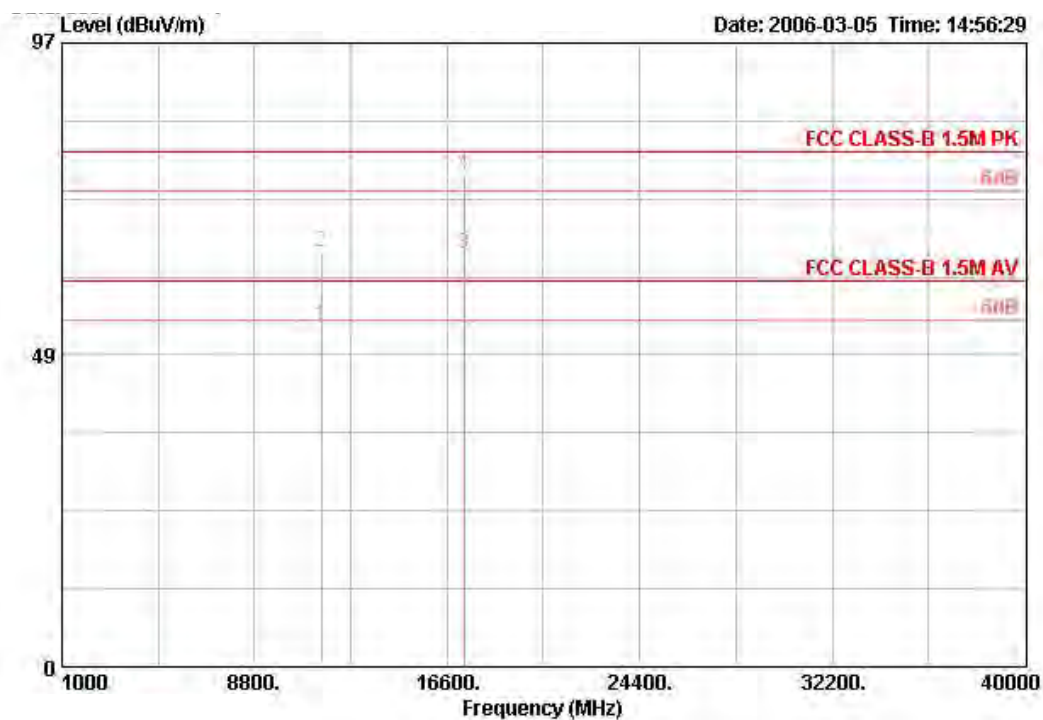

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11518.100	53.10	-6.90	60.00	39.20	7.01	35.10	41.99	AVERAGE	103 7
2 @	11518.100	64.49	-15.51	80.00	39.20	7.01	35.10	53.38	PEAK	103 7
3 @	17279.100	64.19			41.15	17.90	35.01	40.15	AVERAGE	125 236
4 @	17279.100	76.77	-3.23	80.00	41.15	17.90	35.01	52.73	PEAK	125 236

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

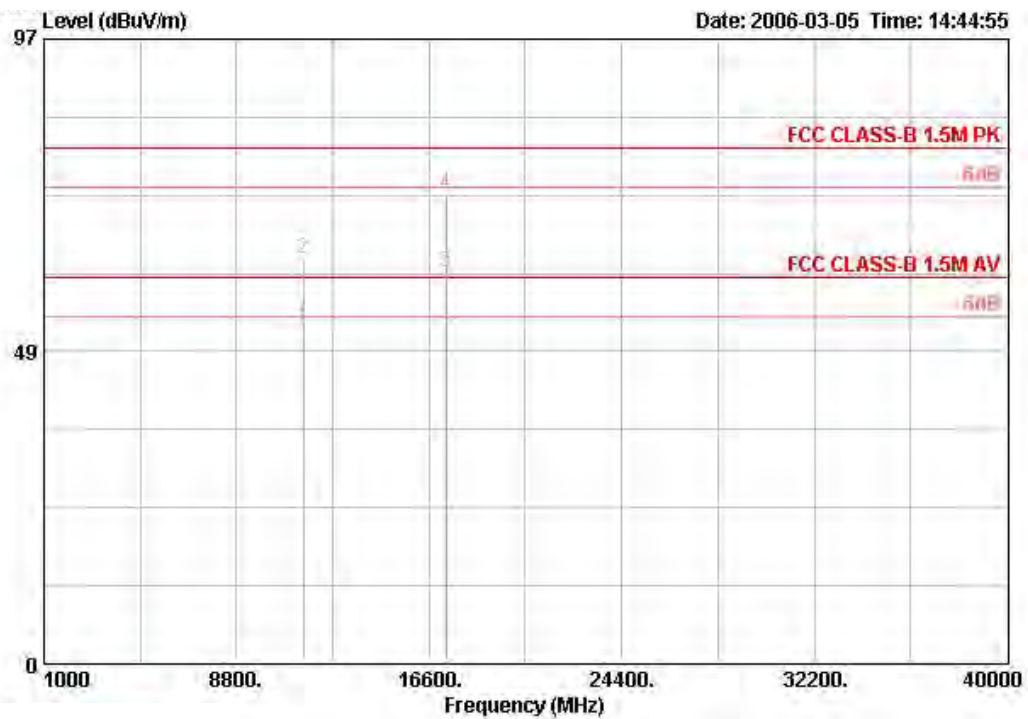


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11519.100	52.29	-7.71	60.00	39.20	7.01	35.11	41.18	AVERAGE	100	306
2 @	11519.100	62.91	-17.09	80.00	39.20	7.01	35.11	51.81	PEAK	100	306
3 @	17275.700	60.82			41.07	17.90	35.01	36.85	AVERAGE	131	250
4 @	17275.700	72.96	-7.04	80.00	41.07	17.90	35.01	48.99	PEAK	131	250

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 160 / Ant. 10


Vertical

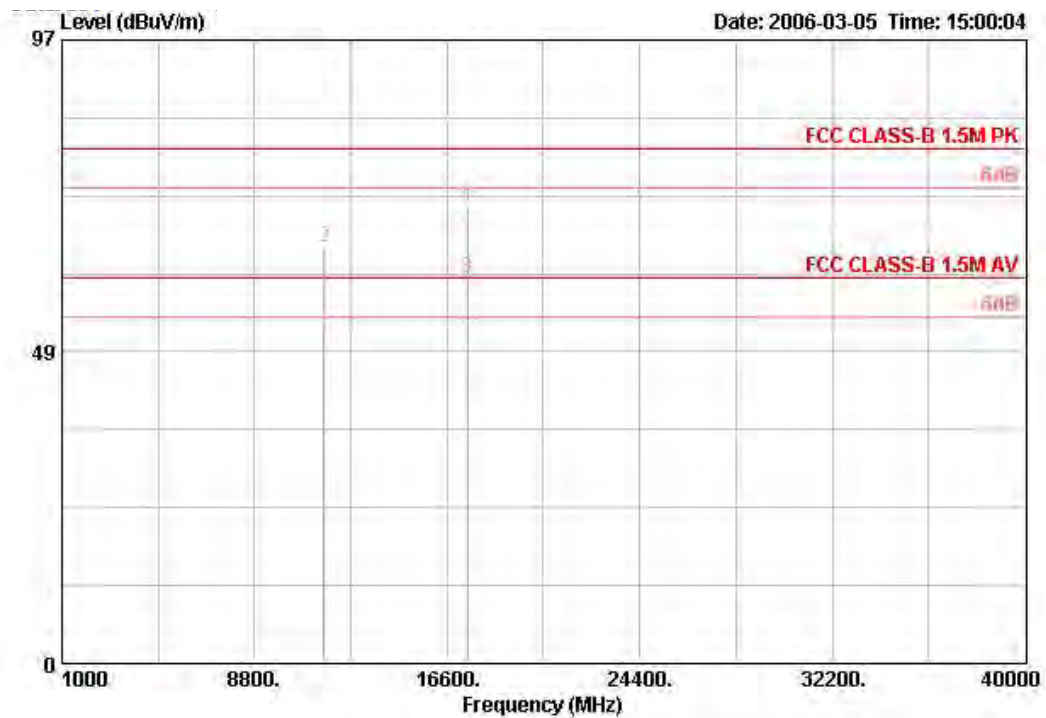

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11601.600	53.08	-6.92	60.00	39.22	7.10	35.14	41.90	AVERAGE	100	10
2 @	11601.600	64.81	-15.19	80.00	39.22	7.10	35.14	53.63	PEAK	100	10
3 @	17415.000	60.12			41.73	16.91	35.07	36.55	AVERAGE	101	310
4 @	17415.000	71.18	-8.82	80.00	41.73	16.91	35.07	47.60	PEAK	101	310

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

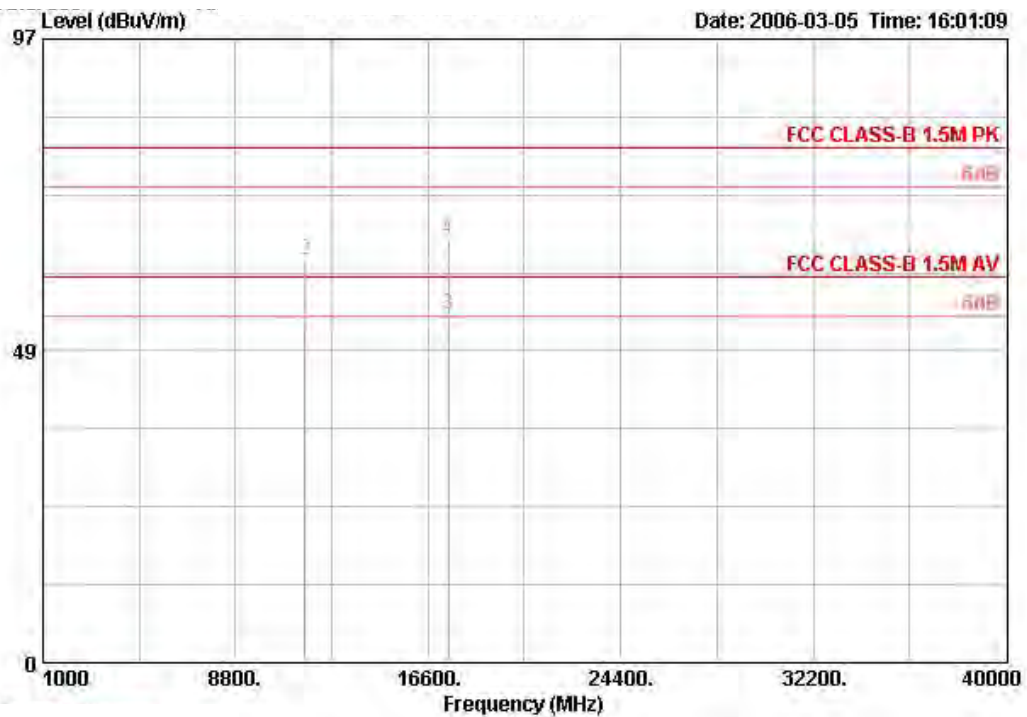

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11600.800	50.84	-9.16	60.00	39.22	7.10	35.14	39.66 AVERAGE	131	274
2 @	11600.800	62.70	-17.30	80.00	39.22	7.10	35.14	51.52 PEAK	131	274
3 @	17409.200	54.12	-5.88	60.00	41.66	16.91	35.06	30.61 AVERAGE	100	278
4 @	17409.200	65.84	-14.16	80.00	41.66	16.91	35.06	42.33 PEAK	100	278

## Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 11

Vertical

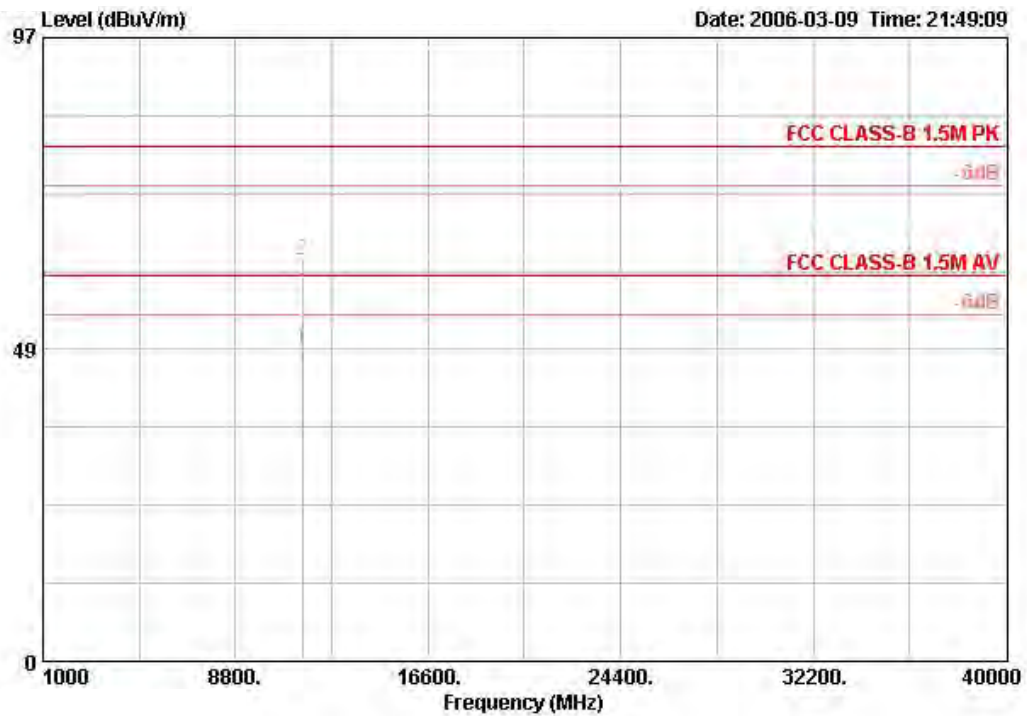

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m		dB	dBUV/m	dB/m	dB	dB	dBUV	cm	deg
1 @	11491.080	48.56	-11.44	60.00	39.20	6.96	35.10	37.50	AVERAGE	101	332
2 @	11497.360	62.43	-17.57	80.00	39.20	6.96	35.10	51.37	PEAK	101	332


## Horizontal

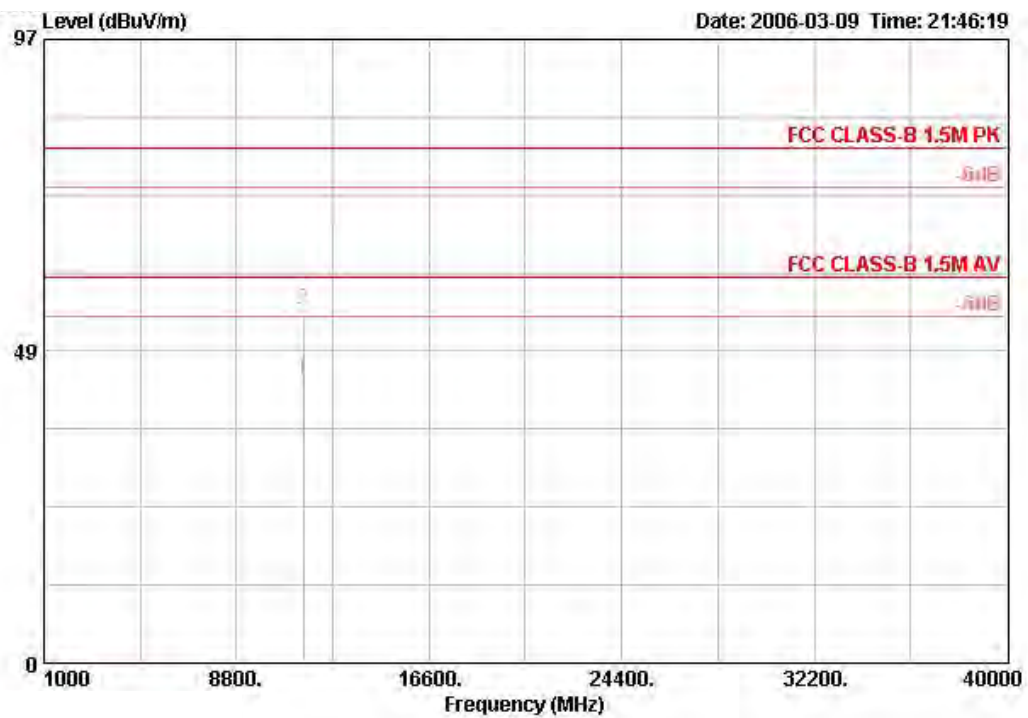

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dB/m	dB	dB	dBuV		cm	deg
1 @	11489.520	44.07	-15.93	60.00	39.20	6.96	33.01	AVERAGE	100	101
2 @	11489.520	54.93	-25.07	80.00	39.20	6.96	43.87	PEAK	100	101


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 11

Vertical

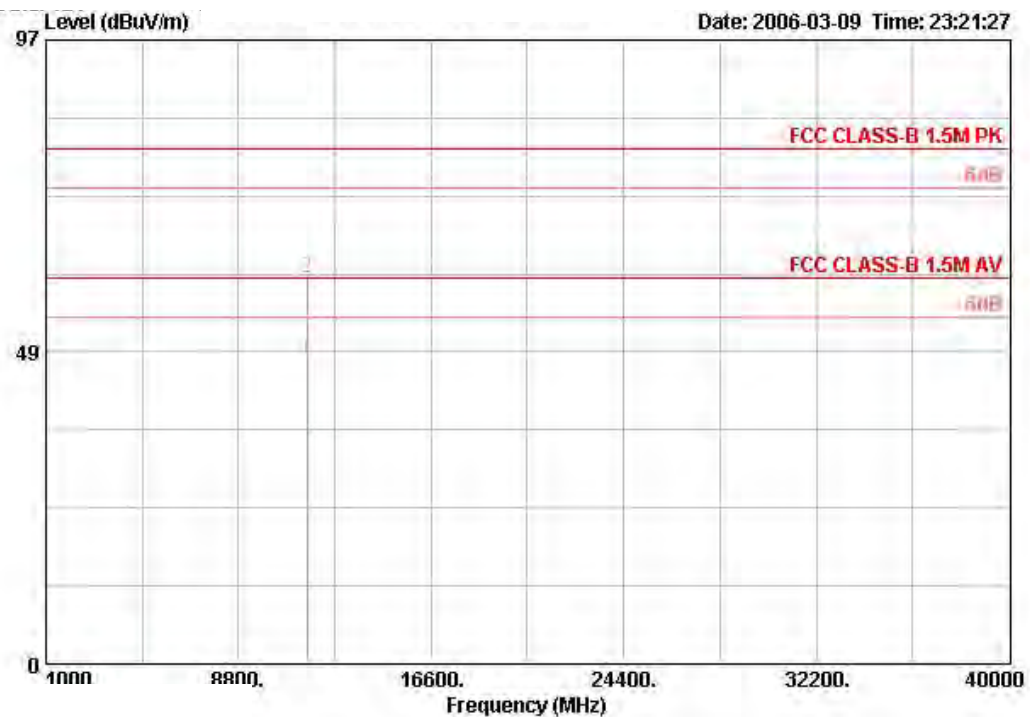

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11570.240	47.24	-12.76	60.00	39.21	7.06	35.13	36.10	AVERAGE	102	310
2	11570.240	59.90	-20.10	80.00	39.21	7.06	35.13	48.77	PEAK	102	310


## Horizontal

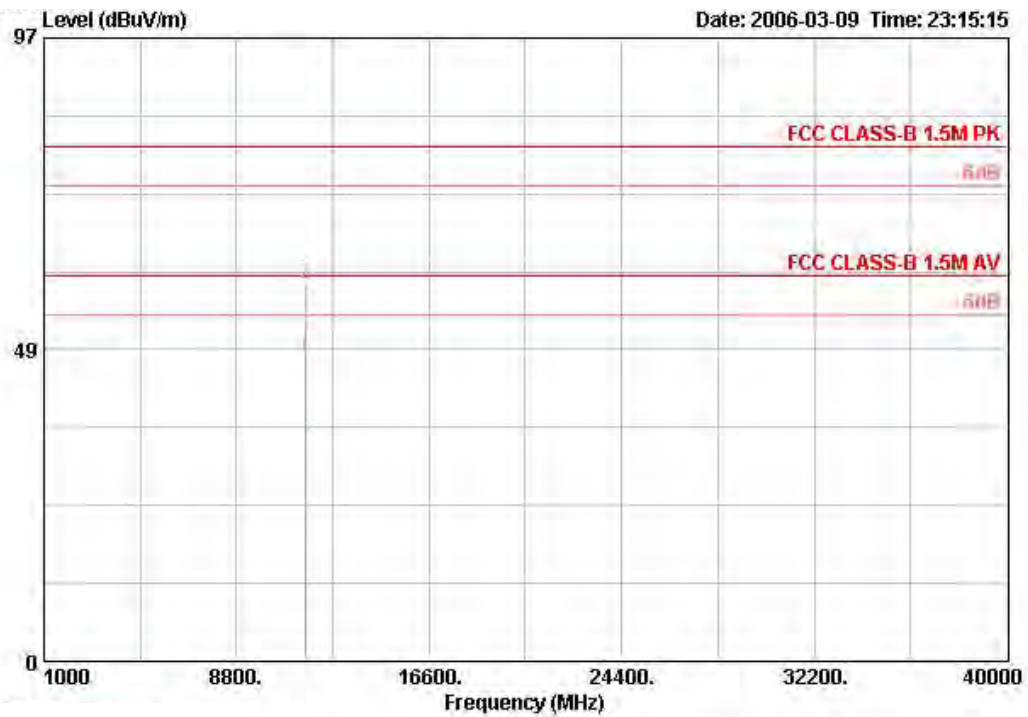

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11570.240	47.39	-12.61	60.00	39.21	7.06	35.13	36.26	AVERAGE	100	340
2	11570.240	58.55	-21.45	80.00	39.21	7.06	35.13	47.41	PEAK	100	340


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 11

Vertical

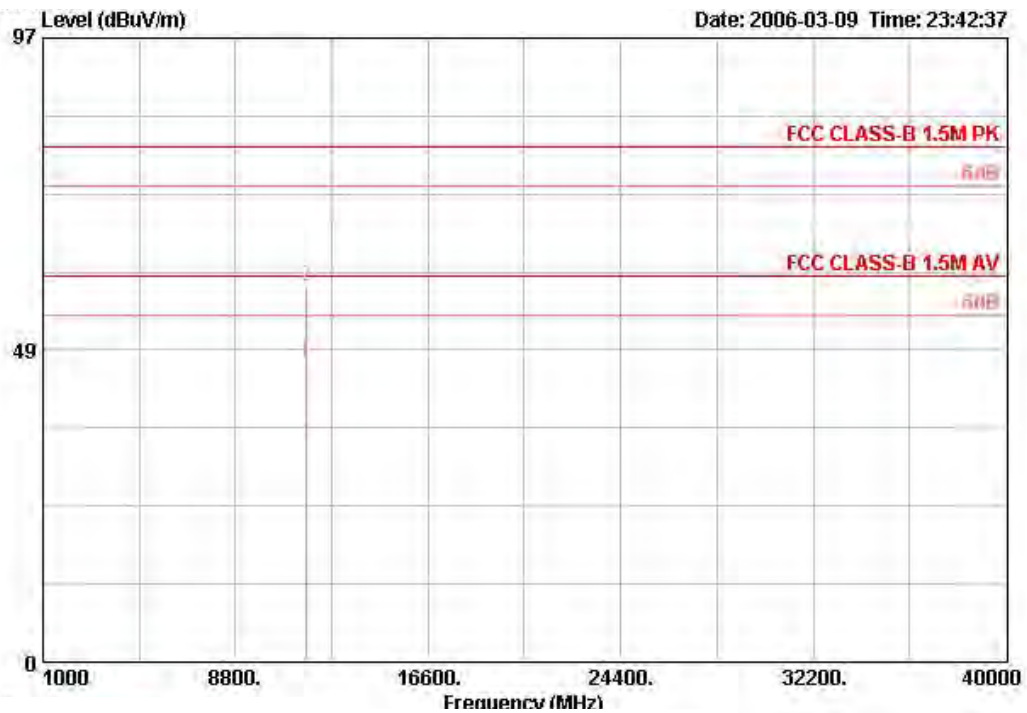

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m		dB	dBuV/m	dB	dB	dBuV		cm	deg
1 @	11650.120	46.54	-13.46	60.00	39.23	7.15	35.16	35.33	AVERAGE	102	311
2 @	11650.120	58.30	-21.70	80.00	39.23	7.15	35.16	47.08	PEAK	102	311


## Horizontal

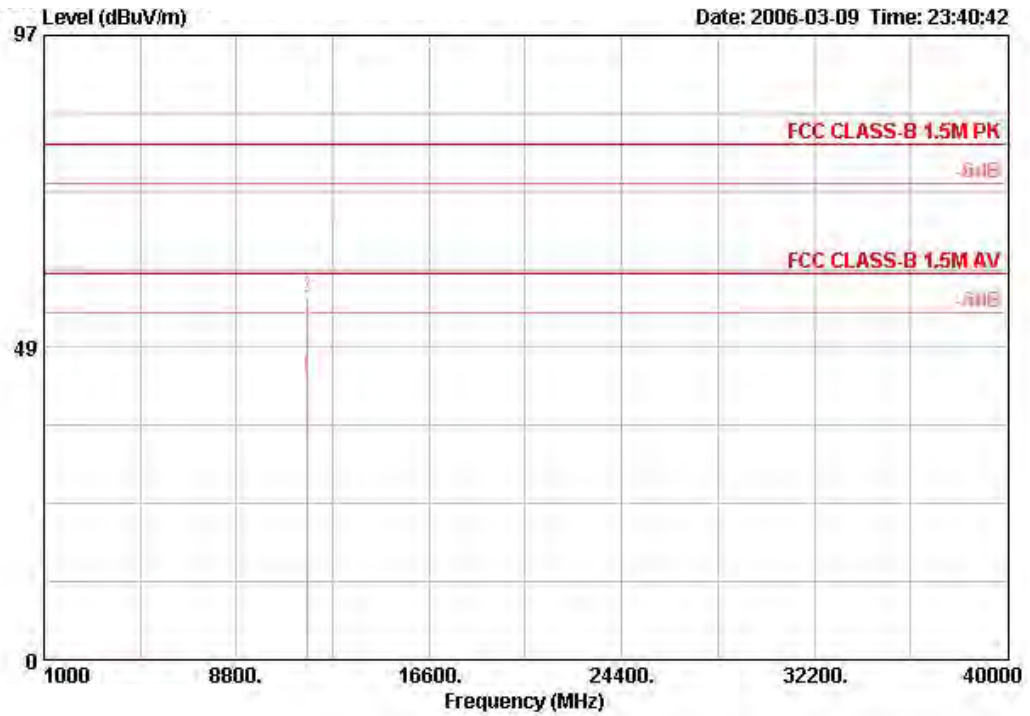

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Gain	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dB/m	dB	dB	dBuV		cm	deg
1 @	11650.200	43.88	-16.12	60.00	39.23	7.15	32.67	AVERAGE	100	56
2 @	11650.200	56.33	-23.67	80.00	39.23	7.15	45.11	PEAK	100	56


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 11

Vertical

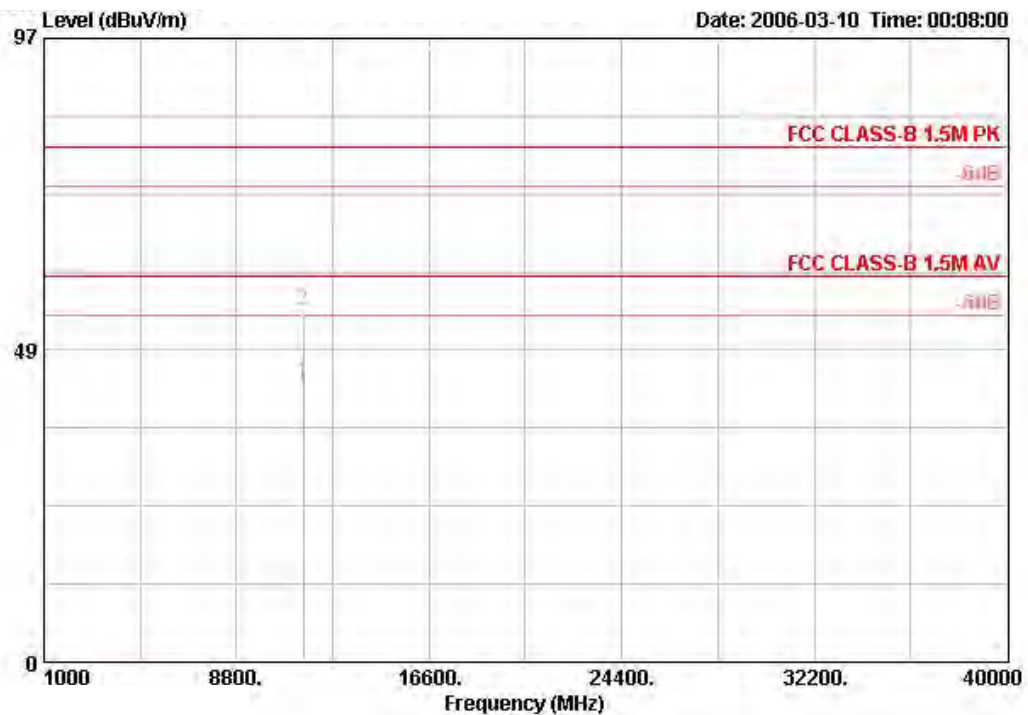

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11521.560	43.32	-16.68	60.00	39.20	7.01	35.11	32.22 AVERAGE	101	311
2 @	11521.560	54.77	-25.23	80.00	39.20	7.01	35.11	43.67 PEAK	101	311


## Horizontal

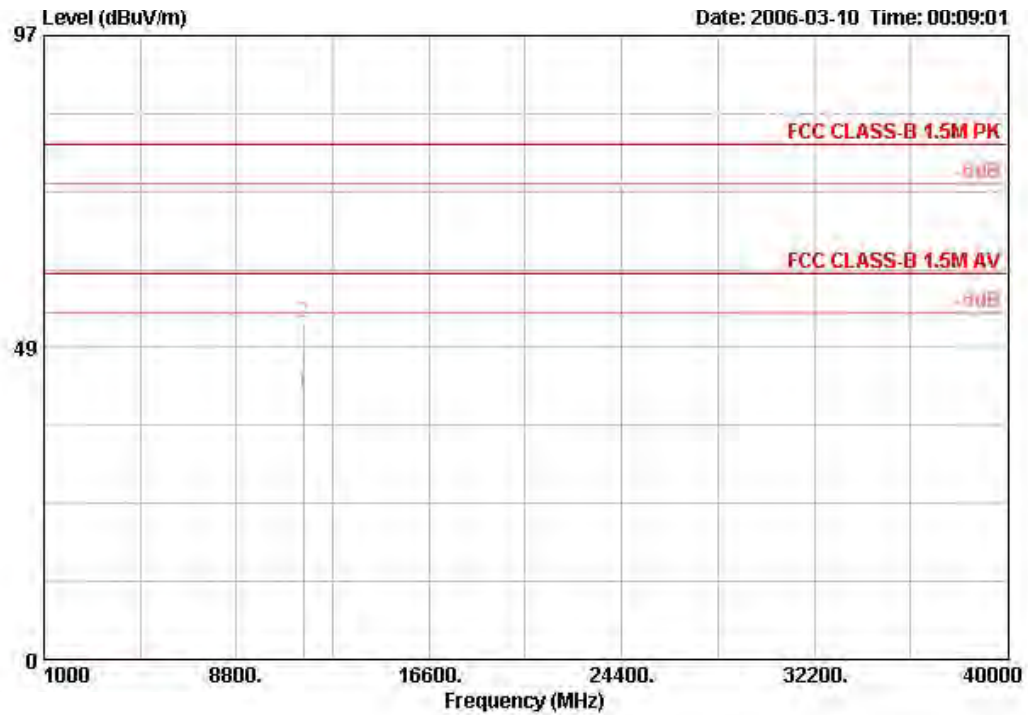

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11521.640	41.45	-18.55	60.00	39.20	7.01	35.11	30.35 AVERAGE	100	56
2 @	11521.640	52.22	-27.78	80.00	39.20	7.01	35.11	41.12 PEAK	100	56


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 160 / Ant. 11

Vertical

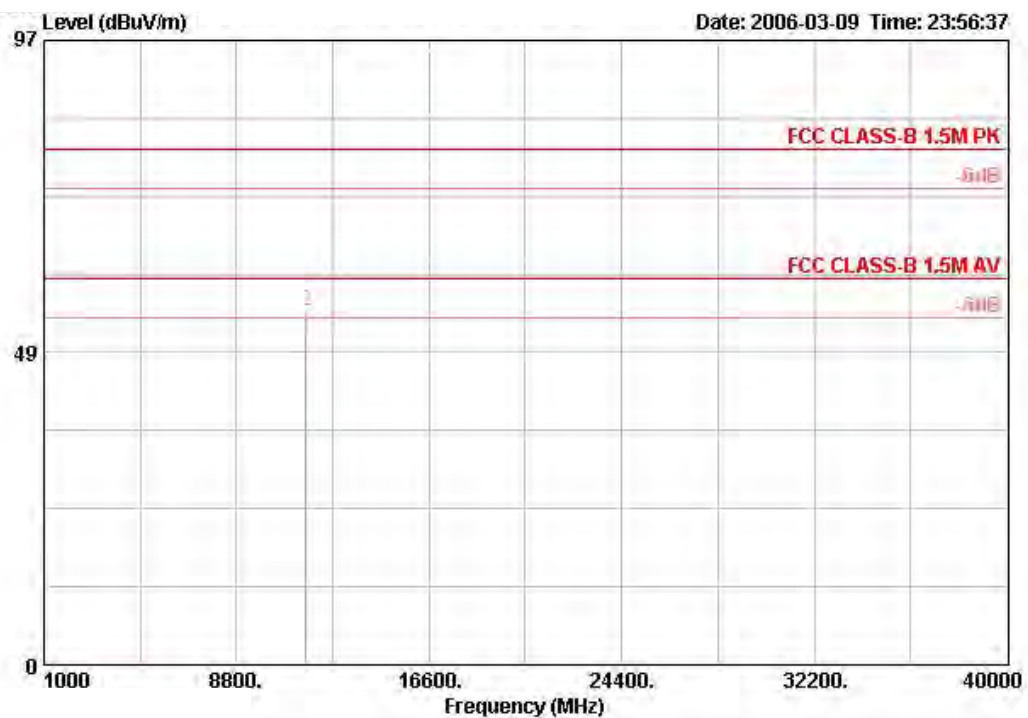

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11597.560	45.27	-14.73	60.00	39.22	7.10	35.14	34.09	AVERAGE	100	311
2 @	11597.560	55.11	-24.89	80.00	39.22	7.10	35.14	43.93	PEAK	100	311

## Horizontal

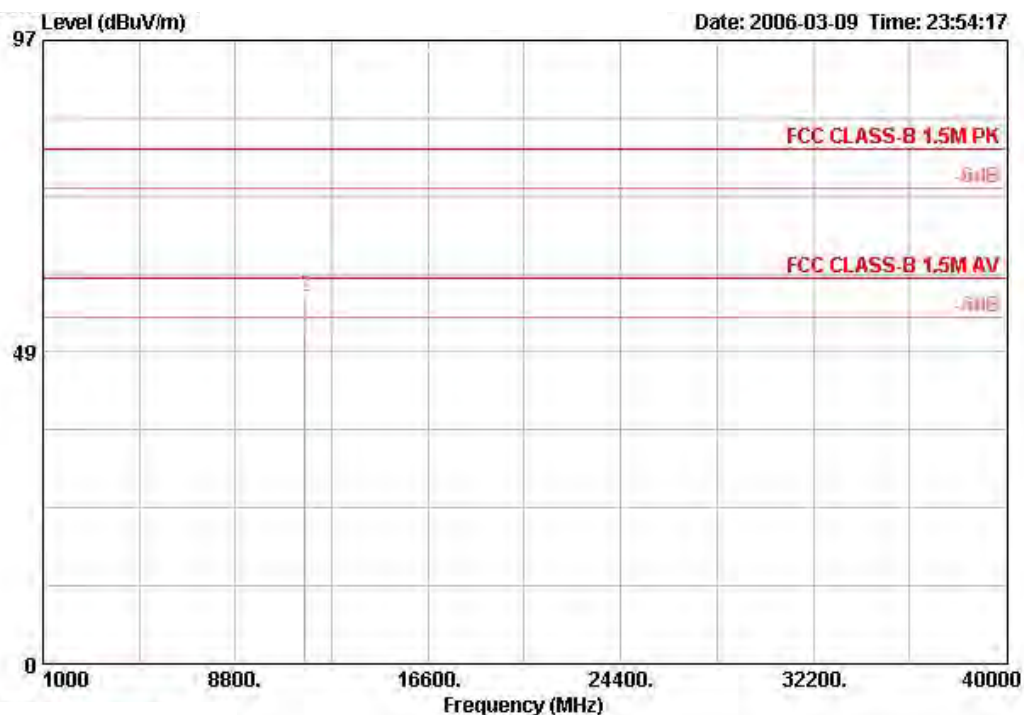

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11597.520	43.87	-16.13	60.00	39.22	7.10	35.14	32.69 AVERAGE	100	56
2 @	11597.520	57.06	-22.94	80.00	39.22	7.10	35.14	45.88 PEAK	100	56

## Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 12


Vertical

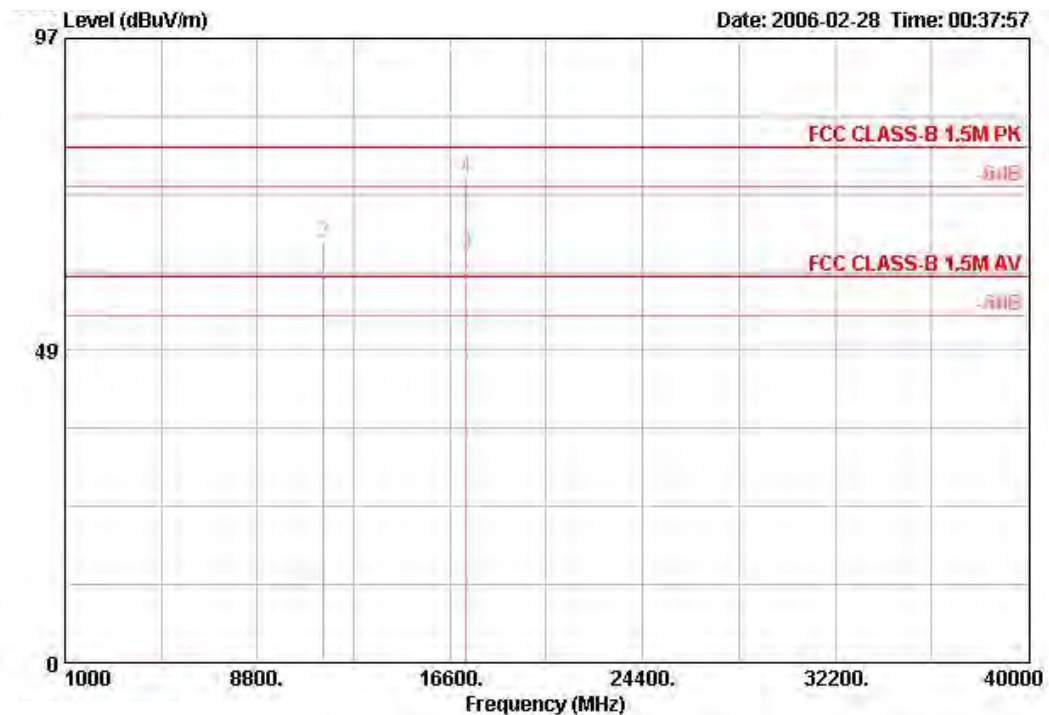

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11489.300	55.31	-4.69	60.00	39.20	6.96	35.10	44.25	AVERAGE	102	242
2 @	11489.300	65.34	-14.66	80.00	39.20	6.96	35.10	54.28	PEAK	102	242
3 @	17233.520	63.49			40.93	18.15	35.00	39.42	AVERAGE	100	313
4 @	17235.600	75.35	-4.65	80.00	40.93	18.15	35.00	51.27	PEAK	100	313

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

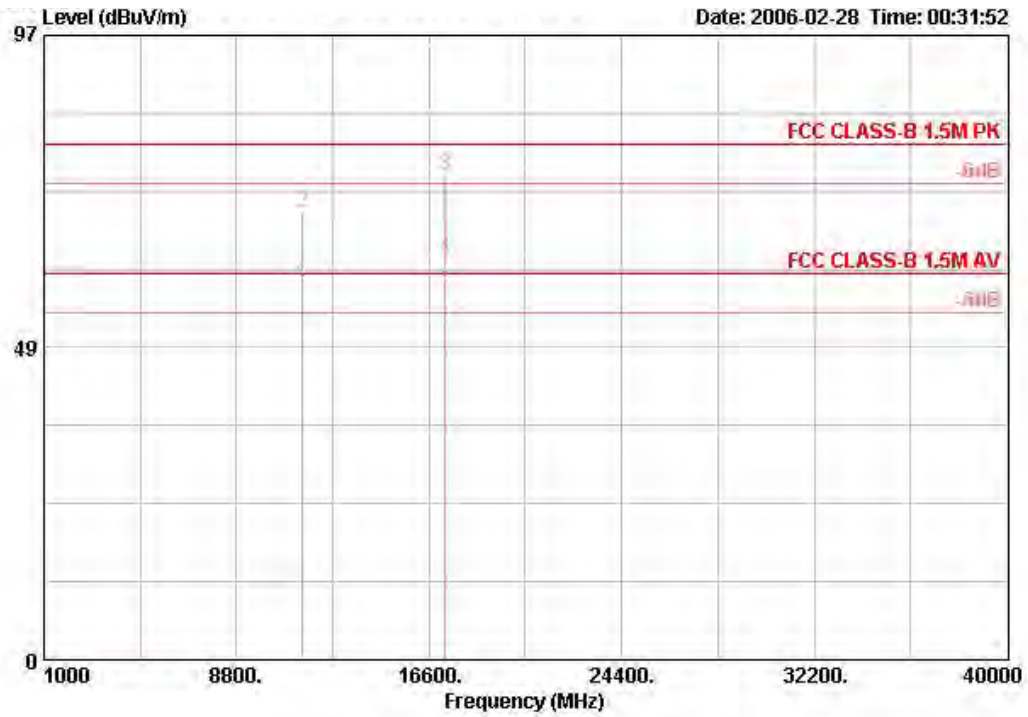


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11488.080	58.47	-1.53	60.00	39.20	6.96	35.10	47.41	AVERAGE	102	3
2 @	11488.080	69.54	-10.46	80.00	39.20	6.96	35.10	58.48	PEAK	102	3
3 @	17232.880	75.44	-4.56	80.00	40.93	18.15	35.00	51.36	PEAK	100	280
4 @	17241.680	62.28			40.93	18.15	35.00	38.20	AVERAGE	100	280

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 12


Vertical

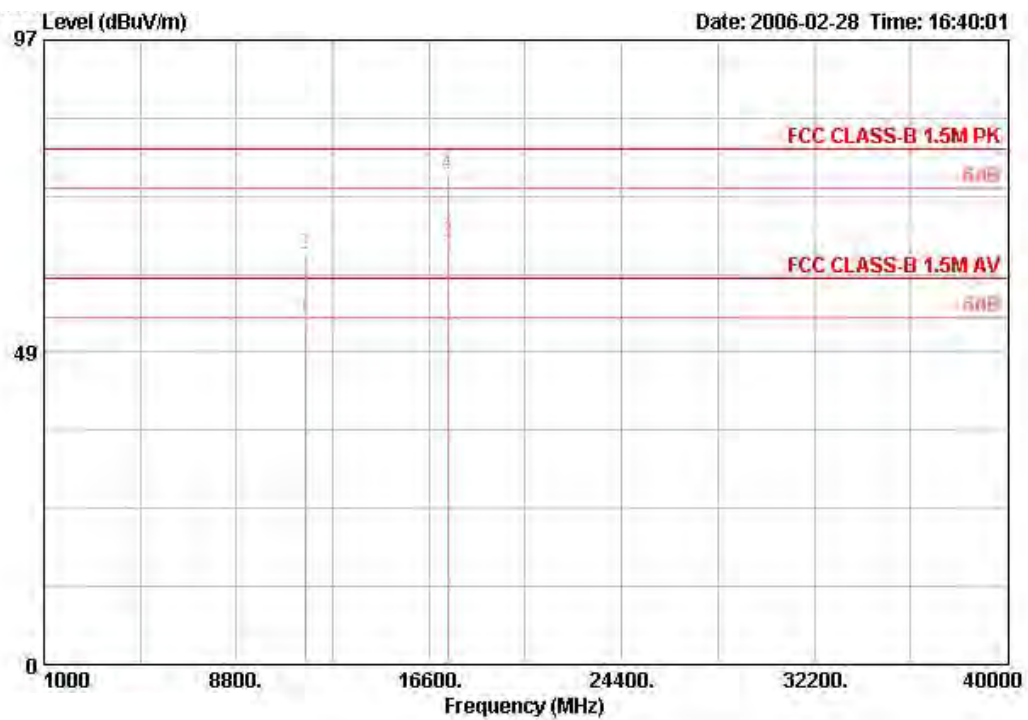

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11570.080	53.92	-6.08	60.00	39.21	7.06	35.13	42.78 AVERAGE	111	240
2 @	11570.080	63.82	-16.18	80.00	39.21	7.06	35.13	52.68 PEAK	111	240
3 @	17359.160	65.45			41.44	17.41	35.05	41.66 AVERAGE	106	260
4 @	17359.160	76.11	-3.89	80.00	41.44	17.41	35.05	52.32 PEAK	106	260

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

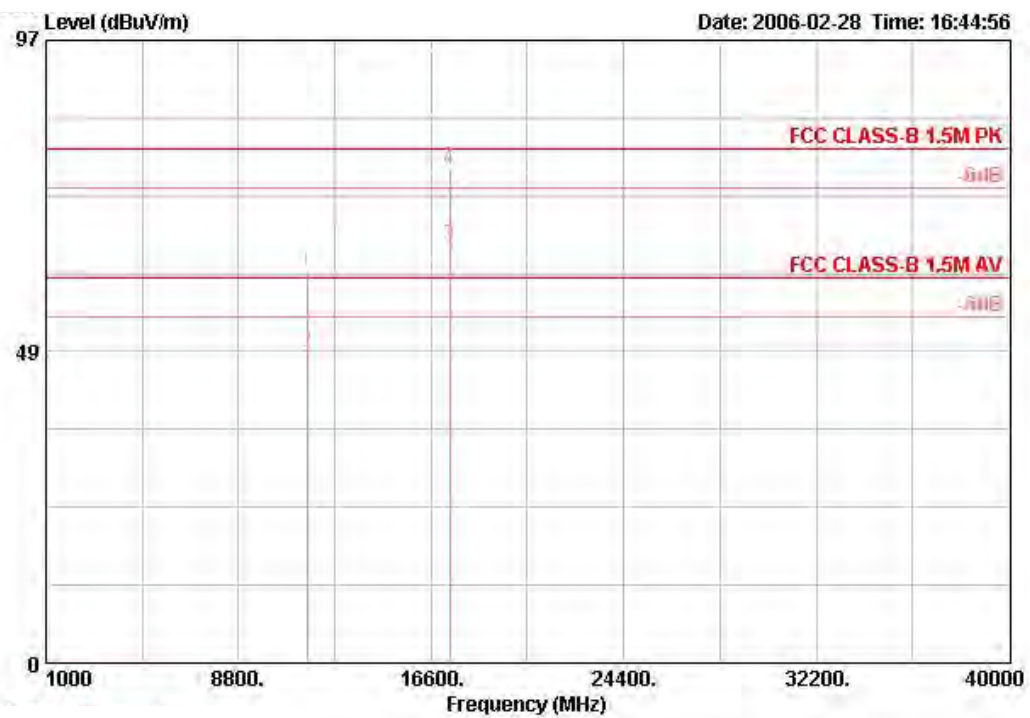


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11572.800	61.11	-18.89	80.00	39.21	7.06	35.13	49.97	PEAK	126	320
2 @	11573.320	48.33	-11.67	60.00	39.21	7.06	35.13	37.20	AVERAGE	126	320
3 @	17359.160	64.98			41.44	17.41	35.05	41.19	AVERAGE	126	293
4 @	17359.160	76.83	-3.17	80.00	41.44	17.41	35.05	53.03	PEAK	126	293

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 12


Vertical

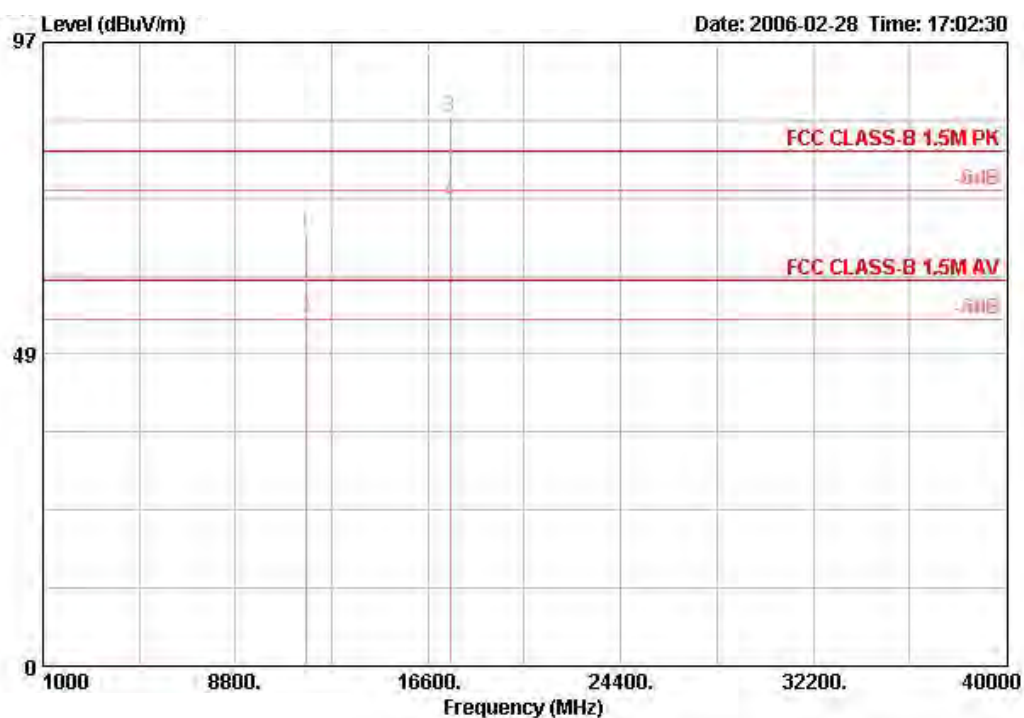

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11654.040	67.05	-12.95	80.00	39.23	7.15	35.16	55.83	PEAK	122	244
2 @	11656.160	54.22	-5.78	60.00	39.23	7.15	35.16	43.00	AVERAGE	122	244
3 @	17477.680	85.28			41.95	16.42	35.09	62.00	PEAK	120	241
4 @	17480.400	72.21			41.95	16.42	35.09	48.93	AVERAGE	120	241

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

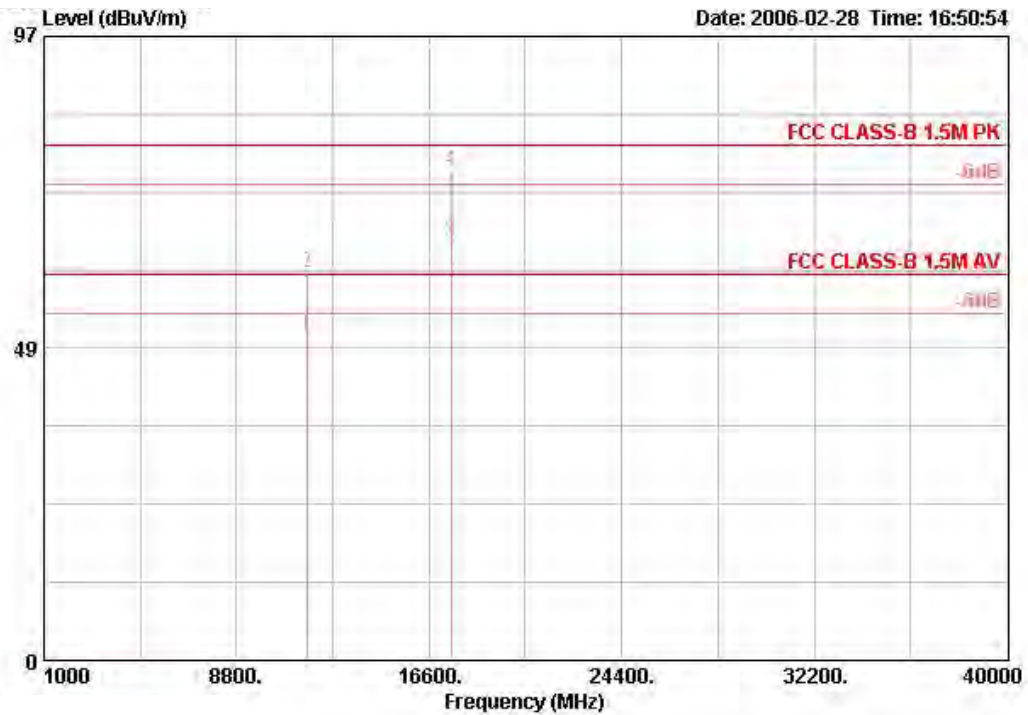


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11650.160	50.16	-9.84	60.00	39.23	7.15	35.16	38.94	AVERAGE	134	306
2 @	11650.160	60.30	-19.70	80.00	39.23	7.15	35.16	49.09	PEAK	134	306
3 @	17476.680	64.96			41.95	16.66	35.09	41.43	AVERAGE	139	268
4 @	17476.680	76.23	-3.77	80.00	41.95	16.66	35.09	52.70	PEAK	139	268

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 12


Vertical

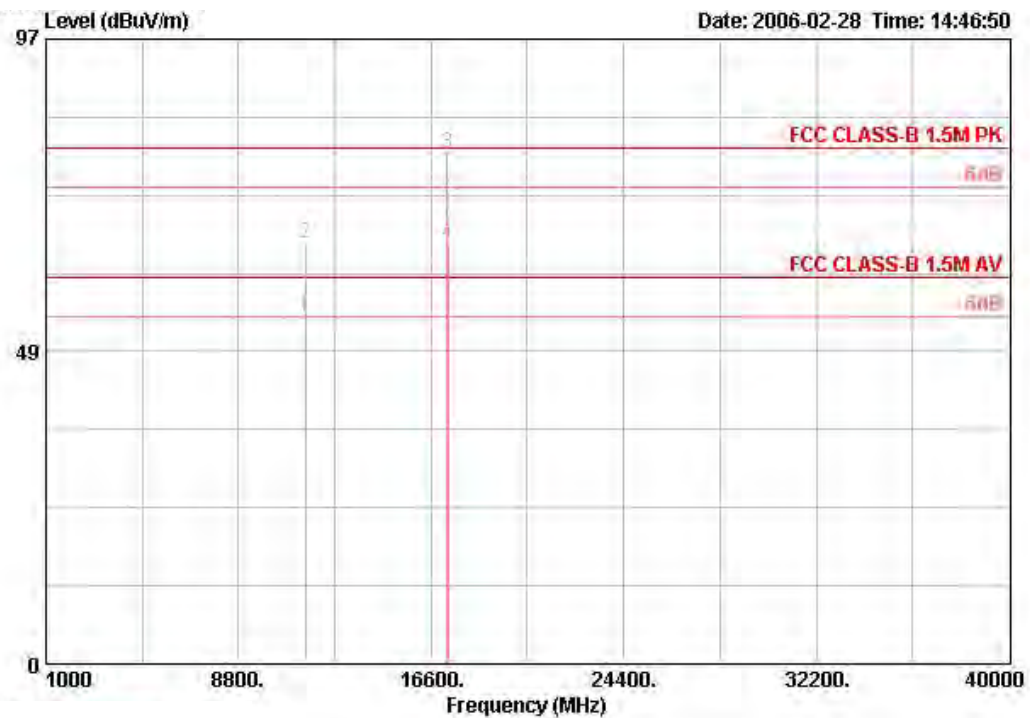

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11518.400	53.80	-6.20	60.00	39.20	7.01	35.10	42.69	AVERAGE	112	239
2 @	11518.400	65.37	-14.63	80.00	39.20	7.01	35.10	54.26	PEAK	112	239
3 @	17258.800	79.20	-0.80	80.00	41.00	17.90	35.01	55.30	PEAK	122	312
4 @	17272.400	65.38			41.07	17.90	35.01	41.41	AVERAGE	122	312

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

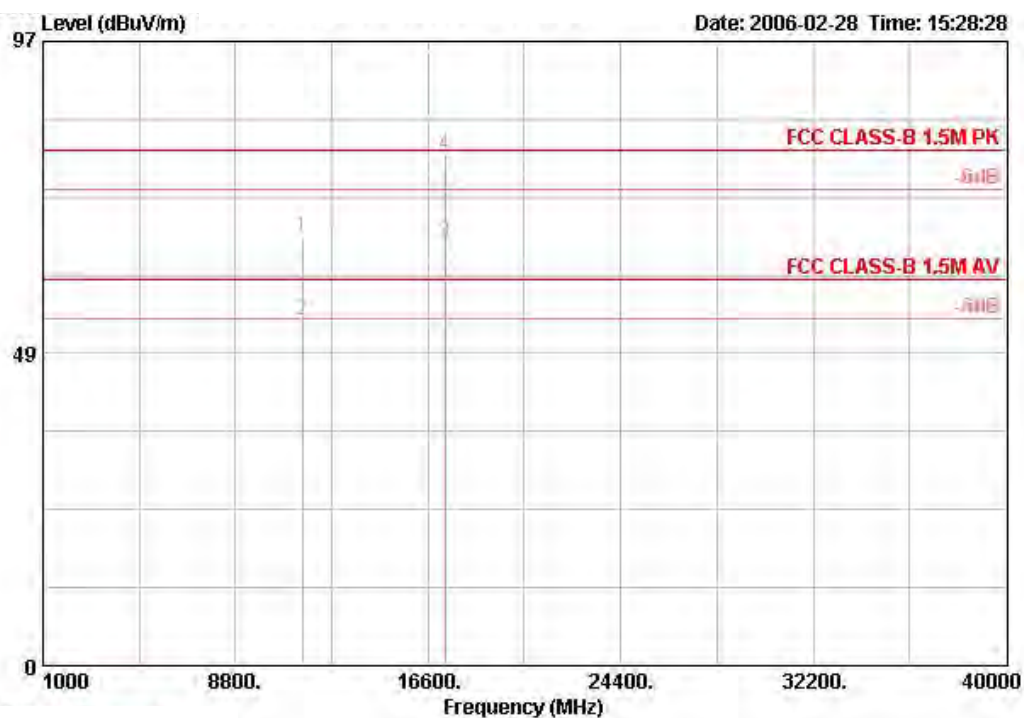


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11518.900	66.61	-13.39	80.00	39.20	7.01	35.11	55.51	PEAK	100	280
2 @	11519.100	53.70	-6.30	60.00	39.20	7.01	35.11	42.60	AVERAGE	100	280
3 @	17275.300	65.70			41.07	17.90	35.01	41.73	AVERAGE	100	280
4 @	17276.200	79.28	-0.72	80.00	41.07	17.90	35.01	55.31	PEAK	100	280

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 160 / Ant. 12


Vertical

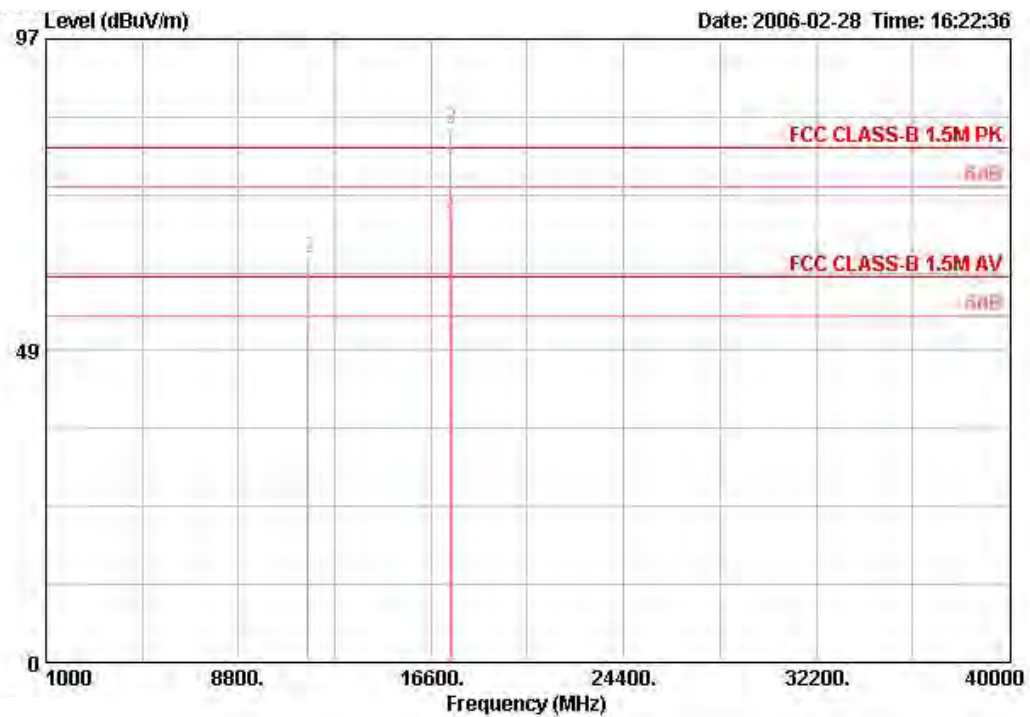

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m		dB	dBUV/m	dB/m	dB	dB	dBUV	cm	deg
1 @	11602.100	49.98	-10.02	60.00	39.22	7.10	35.14	38.80	AVERAGE	125	247
2 @	11602.600	62.81	-17.19	80.00	39.22	7.10	35.14	51.63	PEAK	125	247
3 @	17391.500	82.87			41.59	17.16	35.06	59.18	PEAK	126	318
4 @	17407.100	69.13			41.66	16.91	35.06	45.62	AVERAGE	126	318

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Horizontal

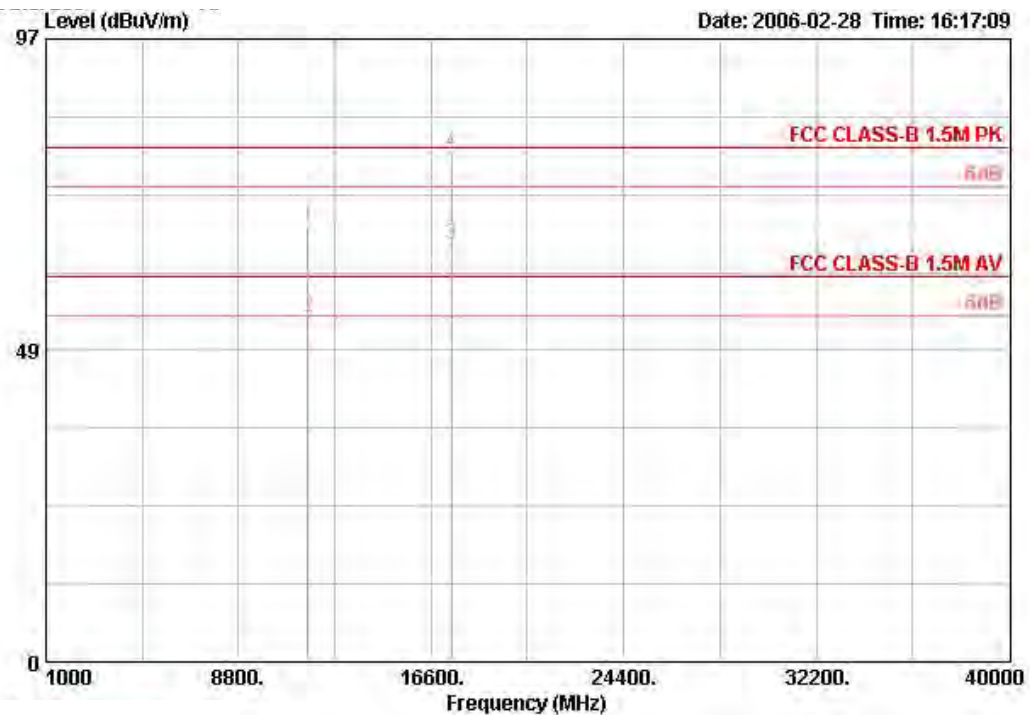

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11602.100	66.03	-11.97	80.00	39.22	7.10	35.14	56.85	PEAK	100	282
2 @	11602.300	53.72	-6.28	60.00	39.22	7.10	35.14	42.53	AVERAGE	100	282
3 @	17407.300	64.95			41.66	16.91	35.06	41.44	AVERAGE	100	276
4 @	17413.000	79.26	-0.74	80.00	41.66	16.91	35.07	55.76	PEAK	100	276

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

## Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 149 / Ant. 13

Vertical

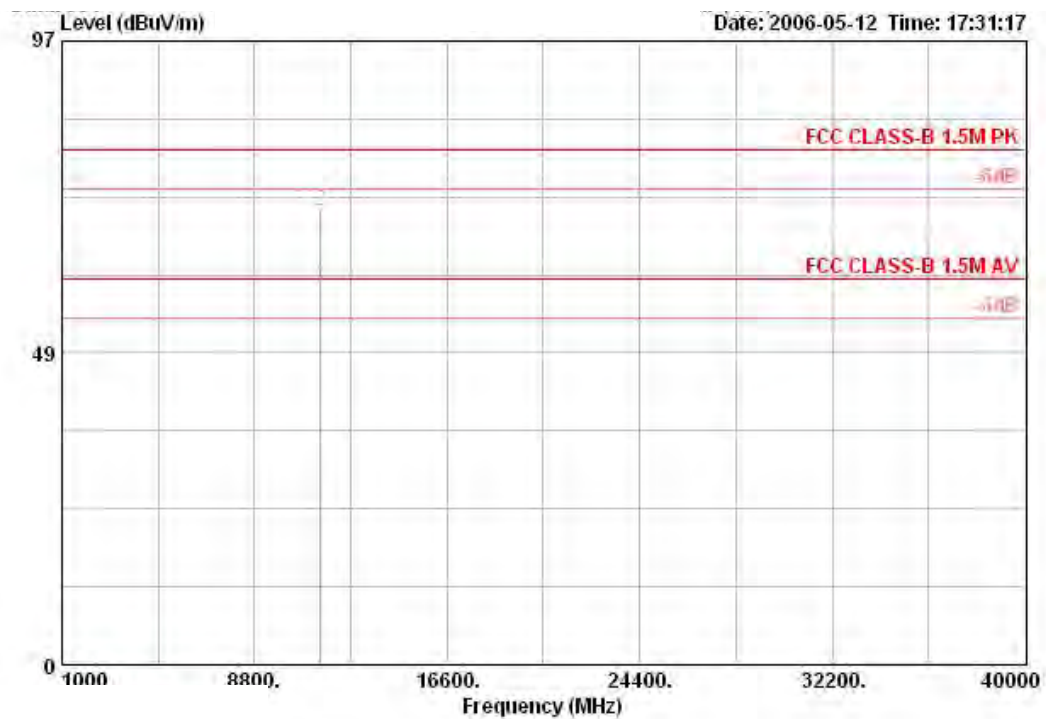

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	11489.000	59.76	-0.24	60.00	39.20	6.96	35.10	48.70 AVERAGE	102	344
2	11489.000	70.59	-9.41	80.00	39.20	6.96	35.10	59.53 PEAK	102	344


## Horizontal

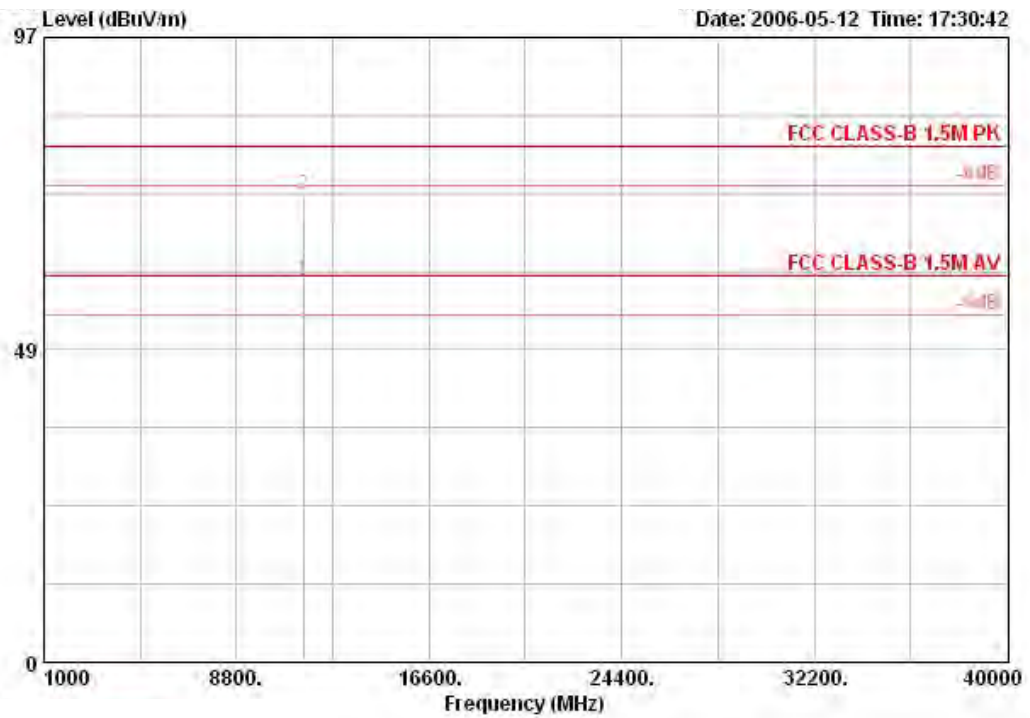

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11490.700	59.28	-0.72	60.00	39.20	6.96	35.10	48.22	AVERAGE	102	344
2	11490.700	72.47	-7.53	80.00	39.20	6.96	35.10	61.41	PEAK	102	344


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 157 / Ant. 13

Vertical

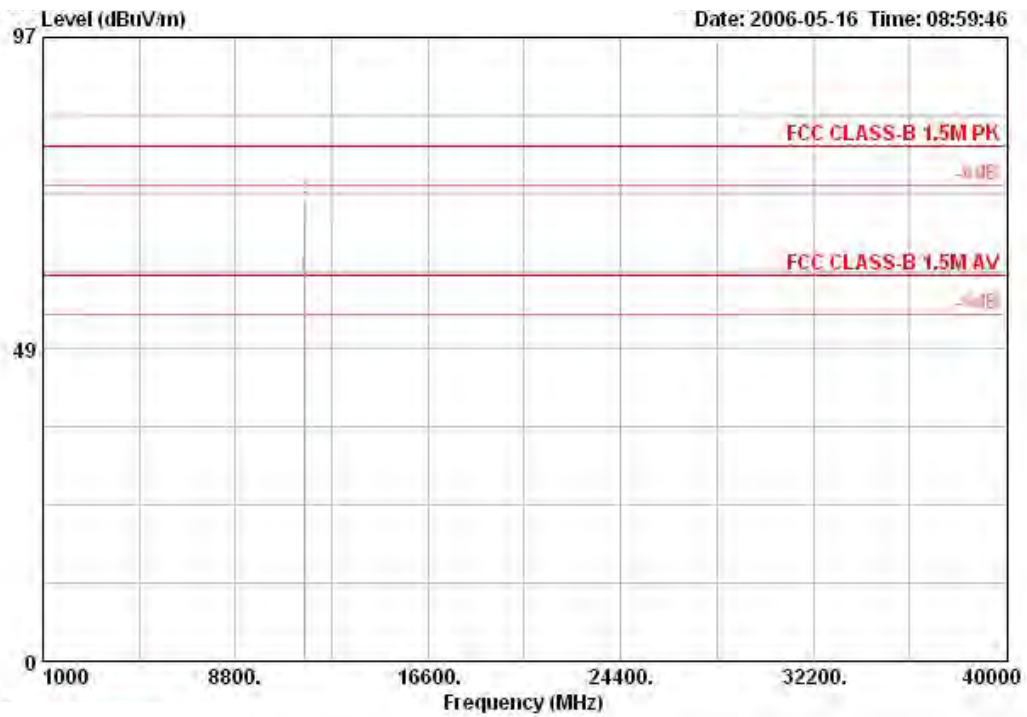

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11570.440	59.85	-0.15	60.00	39.21	7.06	35.13	48.72	AVERAGE	100	44
2	11570.440	71.93	-8.07	80.00	39.21	7.06	35.13	60.79	PEAK	100	44


## Horizontal

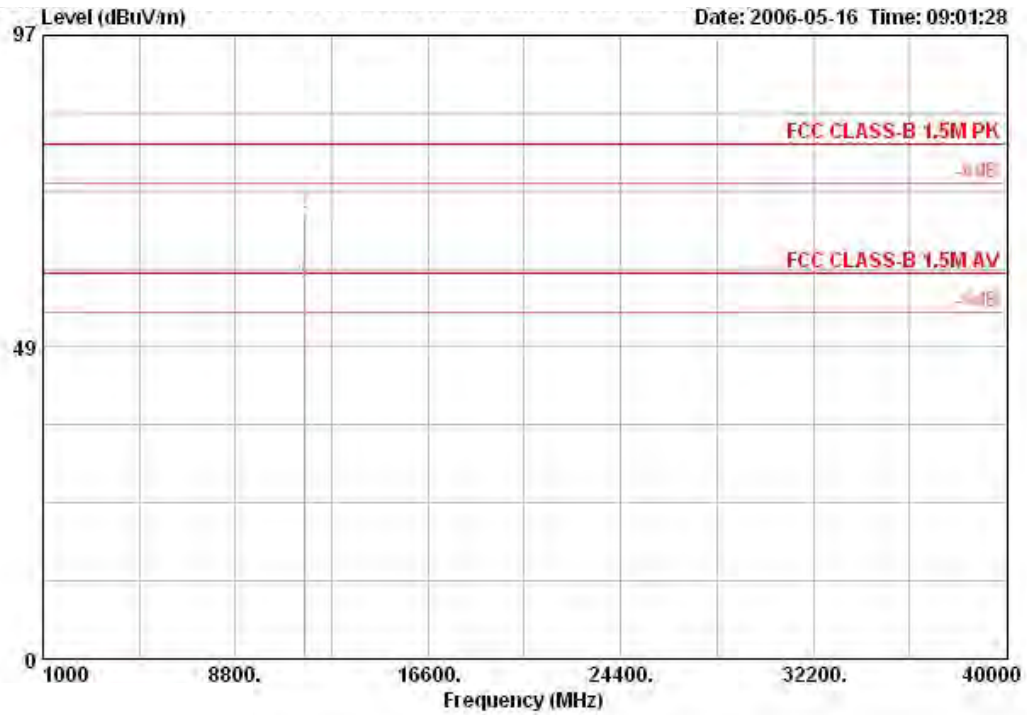

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11571.800	58.32	-1.68	60.00	39.21	7.06	35.13	47.18	AVERAGE	100	322
2	11571.800	69.12	-10.88	80.00	39.21	7.06	35.13	57.98	PEAK	100	322


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Channel 165 / Ant. 13

Vertical

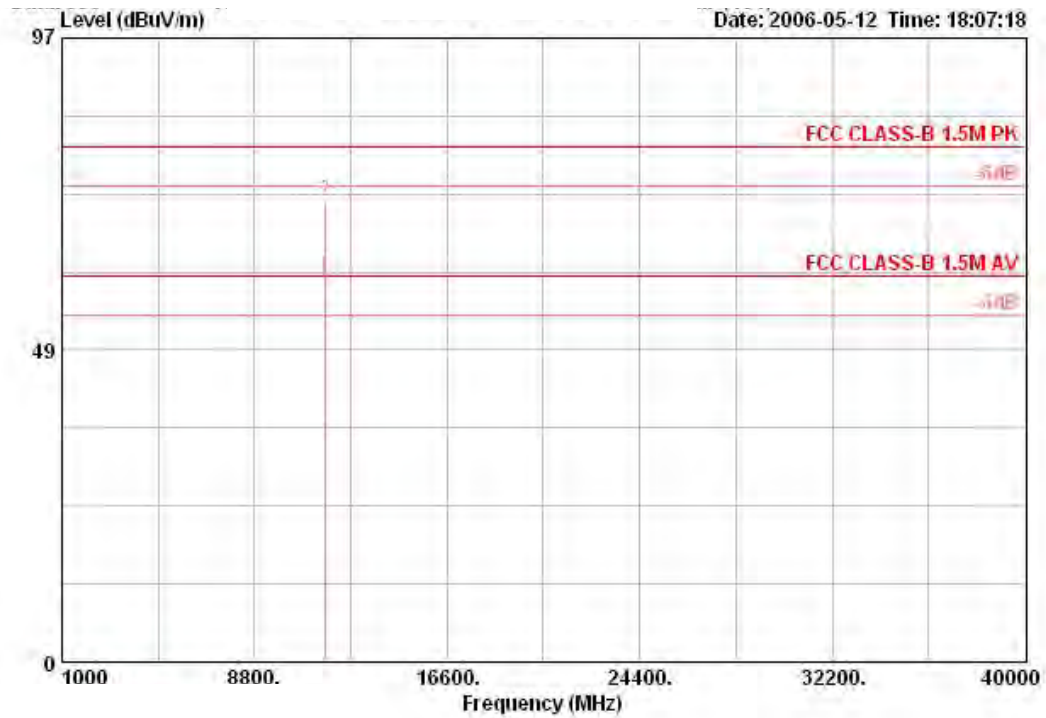

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11650.960	59.83	-0.17	60.00	39.23	7.15	35.16	48.62	AVERAGE	110	347
2	11650.960	71.65	-8.35	80.00	39.23	7.15	35.16	60.44	PEAK	110	347


## Horizontal

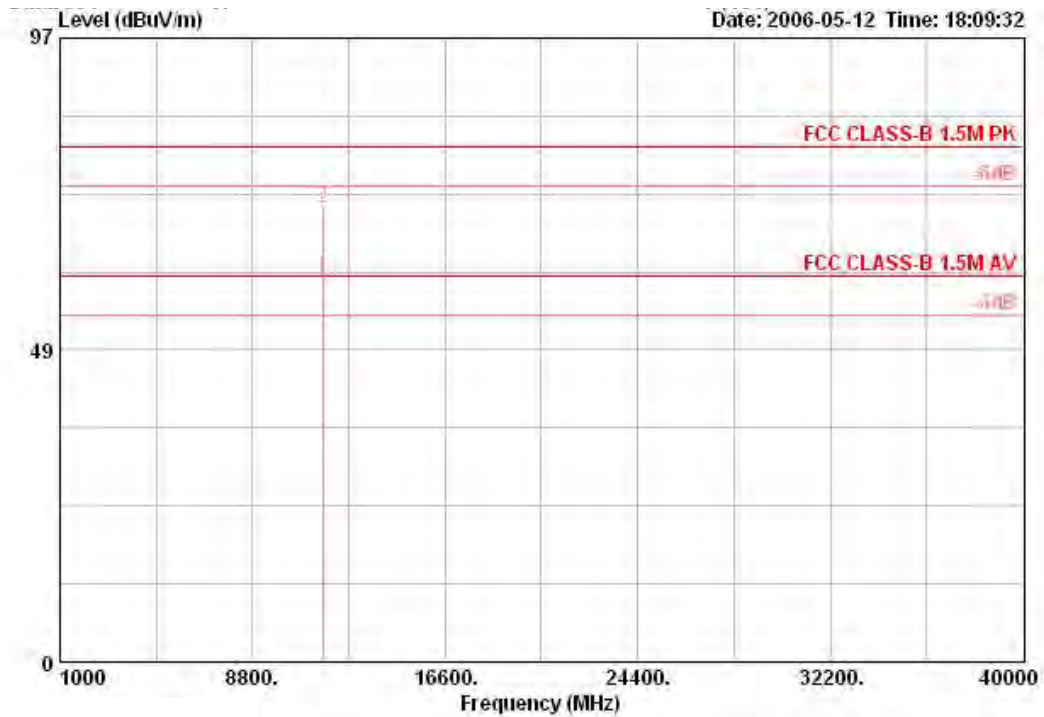

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11650.840	59.84	-0.16	60.00	39.23	7.15	35.16	48.62	AVERAGE	100	24
2	11650.840	70.47	-9.53	80.00	39.23	7.15	35.16	59.25	PEAK	100	24


Temperature	24°C	Humidity	64%
Test Engineer	Rush Kao	Configurations	802.11a Turbo Channel 152 / Ant. 13

Vertical

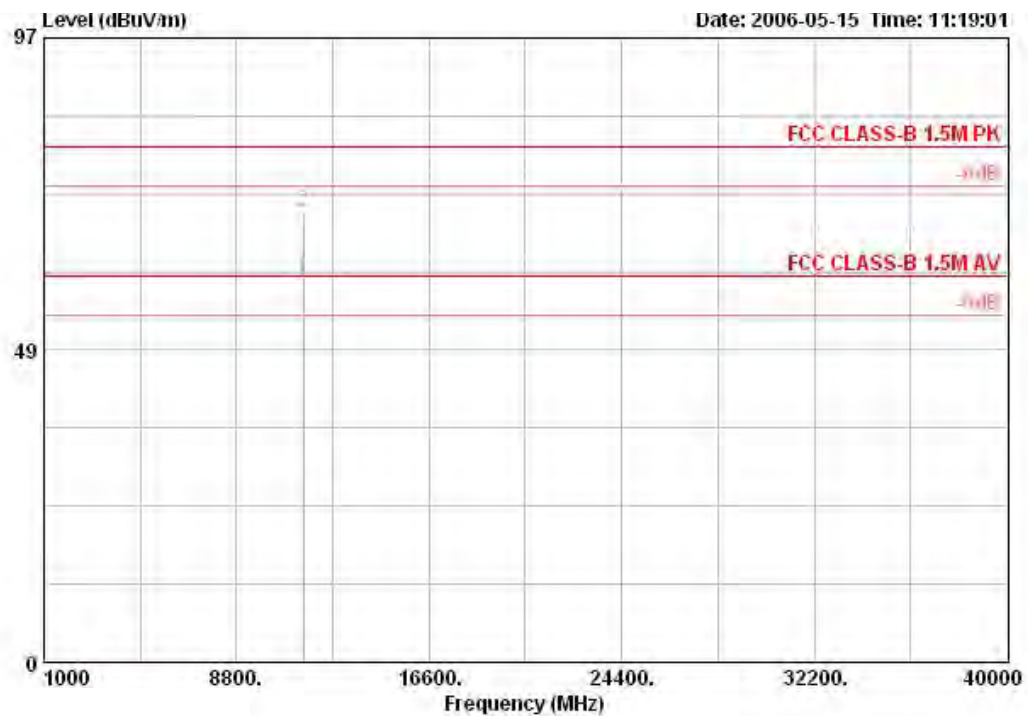

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11519.400	59.80	-0.20	60.00	39.20	7.01	35.11	48.70	AVERAGE	100	341
2	11519.400	69.92	-10.08	80.00	39.20	7.01	35.11	58.82	PEAK	100	341

## Horizontal

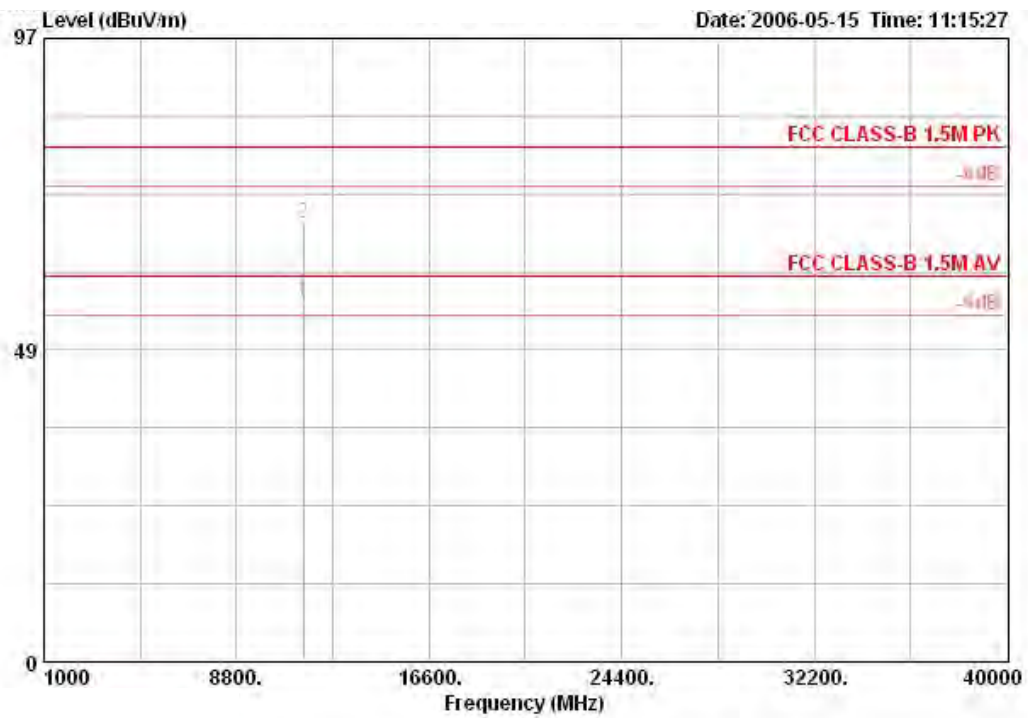

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11521.300	56.18	-3.82	60.00	39.20	7.01	35.11	45.08	AVERAGE	100	60
2	11521.300	68.32	-11.68	80.00	39.20	7.01	35.11	57.22	PEAK	100	60